


## Wire Terminal

### T-3/4 Wire Terminal Standard Bulb Length

Line Nos.	Oshino Lamp Numbers	Design Volts	Design Amps	AVG. MSCd	Filament shape	Life (hours)
1	OL-2404	5.0	.02	.02	CC-6	20,000
2	OL-2400	5.0	.021	.034	CC-6	10,000
3	OL-2426	5.0	.03	.03	C-2R	16,000
4	OL-2415	5.0	.04	.025	C-2R	50,000
5	OL-6803	5.0	.06	.03	C-2R	200,000
6	OL-6803AS15	5.0	.06	.03	C-2R	200,000
7	OL-6833	5.0	.06	.05	C-2R	100,000
8	OL-6833AS15	5.0	.06	.05	C-2R	100,000
9	OL-2436	5.0	.06	.15	C-2R	5,000
10	OL-7133	5.0	.075	.09	C-2R	40,000
11	OL-7133AS15	5.0	.075	.09	C-2R	40,000
12	OL-7153	5.0	.115	.15	C-2R	40,000
13	OL-7153AS15	5.0	.115	.15	C-2R	40,000
14	OL-2449	5.0	.115	.20	C-2R	5,000

Lamp Design Characteristics

Unit in mm  
(inch)

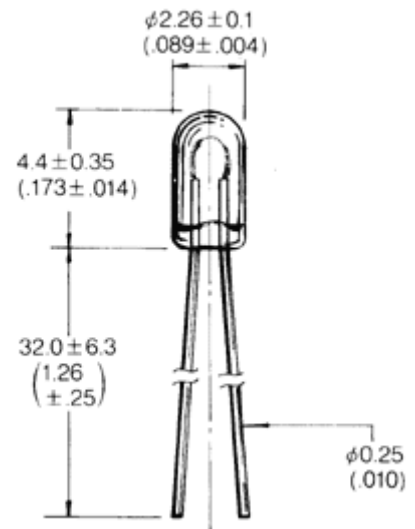

Copyright © 2006 OSHINO LAMPS LIMITED All Rights Reserved.


## Wire Terminal

### T-3/4 Wire Terminal Short Bulb Length

Line Nos.	Oshino Lamp Numbers	Design Volts	Design Amps	AVG. MSCd	Filament shape	Life (hours)
15	OL-24042	5.0	.02	.02	CC-6	20,000
16	OL-68332	5.0	.06	.05	C-2R	100,000
17	OL-68332AS15	5.0	.06	.05	C-2R	100,000
18	OL-24362	5.0	.06	.15	C-2R	5,000
19	OL-71332	5.0	.075	.09	C-2R	40,000
20	OL-71332AS15	5.0	.075	.09	C-2R	40,000
21	OL-71532	5.0	.115	.15	C-2R	40,000
22	OL-71532AS15	5.0	.115	.15	C-2R	40,000

Lamp Design Characteristics

Unit in mm  
(inch)

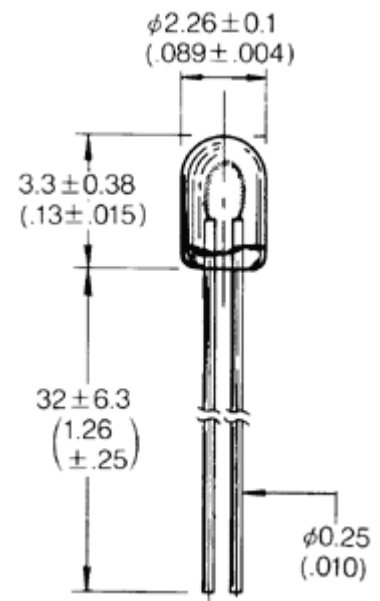

Copyright © 2006 OSHINO LAMPS LIMITED All Rights Reserved.


## Wire Terminal

### T-1 Wire Terminal

Line Nos.	Oshino Lamp Numbers	Design Volts	Design Amps	AVG. MSCd	Filament shape	Life (hours)
1	OL-3413	2.25	.30	.45	C-2R	20
2	OL-3017	3.0	.008	.001	C-6	16,000
3	OL-2128	3.0	.012	.0005	C-6	25,000
4	OL-3037	3.0	.04	.03	C-2R	10,000
5	OL-3010	3.0	.06	.03	C-2R	50,000
6	OL-3011	3.0	.12	.15	C-2R	3,000
7	OL-3001	5.0	.015	.002	C-2V	25,000
8	OL-3043	5.0	.02	.02	C-2R	20,000
9	OL-3019	5.0	.021	.034	C-2R	10,000
10	OL-3056	5.0	.03	.03	C-2R	16,000
11	OL-3009	5.0	.04	.025	C-2R	50,000
12	OL-680	5.0	.06	.03	C-2R	100,000
13	OL-680AS15	5.0	.06	.03	C-2R	100,000
14	OL-683	5.0	.06	.05	C-2R	100,000
15	OL-683AS15	5.0	.06	.05	C-2R	100,000
16	OL-3070	5.0	.06	.15	C-2R	5,000
17	OL-713	5.0	.075	.09	C-2R	40,000
18	OL-713AS15	5.0	.075	.09	C-2R	40,000
19	OL-715	5.0	.115	.15	C-2R	40,000
20	OL-715AS15	5.0	.115	.15	C-2R	40,000
21	OL-715F1	5.0	.125	.22	C-2R	5,000
22	OL-3093	6.0	.04	.04	C-2R	10,000
23	OL-3041	6.0	.06	.13	C-2R	3,000
24	OL-1088	10.0	.027	.09	C-2F	10,000
25	OL-3023	12.0	.03	.10	C-2F	10,000
26	OL-1089	12.0	.06	.15	C-2F	16,000
27	OL-3228	14.0	.04	.15	C-2F	16,000
28	OL-1111	14.0	.065	.15	C-2F	12,000
29	OL-1092	18.0	.026	.15	C-2F	10,000
30	OL-3316	18.0	.035	.15	C-2F	12,000
31	OL-3091S	24.0	.02	.05	CC-2F	5,000
32	OL-3091	28.0	.02	.05	CC-2F	5,000
33	OL-6838	28.0	.024	.15	CC-2F	5,000

Lamp Design Characteristics

Unit in mm  
(inch)

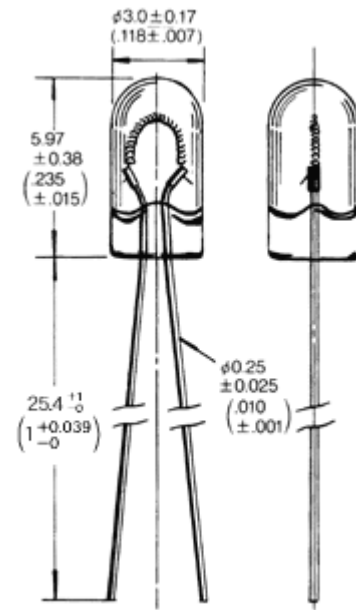

Lead Dia is 0.3mm when taped on reel.


## Wire Terminal

### T-1 Short Wire Terminal

Line Nos.	Oshino Lamp Numbers	Design Volts	Design Amps	AVG. MSCd	Filament shape	Life (hours)
34	OL-30432	5.0	.02	.02	CC-6	20,000
35	OL-30192	5.0	.021	.034	C-2R	10,000
36	OL-6802	5.0	.06	.03	C-2R	200,000
37	OL-6802AS15	5.0	.06	.03	C-2R	200,000
38	OL-6832	5.0	.06	.05	C-2R	100,000
39	OL-6832AS15	5.0	.06	.05	C-2R	100,000
40	OL-30702	5.0	.06	.15	C-2R	5,000
41	OL-7132	5.0	.075	.09	C-2R	40,000
42	OL-7132AS15	5.0	.075	.09	C-2R	40,000
43	OL-7152	5.0	.115	.15	C-2R	40,000
44	OL-7152AS15	5.0	.115	.15	C-2R	40,000
45	OL-7152F1	5.0	.125	.22	C-2R	5,000
46	OL-32282	14.0	.04	.15	CC-2F	1,000
47	OL-8552	28.0	.02	.15	CC-2F	1,500

Lamp Design Characteristics

Unit in mm  
(inch)

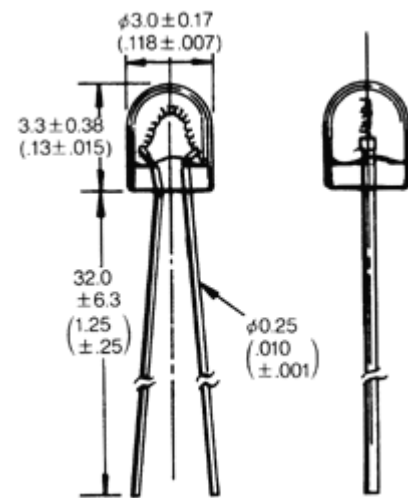

Copyright © 2006 OSHINO LAMPS LIMITED All Rights Reserved.


## Wire Terminal

### T-1 1/4 Wire Terminal

Line Nos.	Oshino Lamp Numbers	Design Volts	Design Amps	AVG. MSCd	Filament shape	Life (hours)
1	OL-580	5.0	.06	.03	C-2R	200,000
2	OL-583	5.0	.06	.05	C-2R	100,000
3	OL-4125	5.0	.06	.15	C-2R	5,000
4	OL-4003	5.0	.075	.09	C-2R	40,000
5	OL-515	5.0	.115	.15	C-2R	40,000
6	OL-4041	6.0	.04	.04	C-2V	10,000
7	OL-2114	6.0	.06	.13	C-2R	3,000
8	OL-634	6.0	.20	.63	C-2R	500
9	OL-610	6.3	.20	.55	C-2R	5,000
10	OL-4107	10.0	.014	.004	C-2F	50,000
11	OL-4031	12.0	.04	.12	C-2F	10,000
12	OL-4177	12.0	.04	.04	C-2F	25,000
13	OL-4054	12.0	.06	.15	C-2F	16,000
14	OL-4239	14.0	.04	.15	C-2F	8,000
15	OL-4168	14.0	.067	.175	C-2F	15,000
16	OL-640	14.0	.08	.30	C-2F	15,000
17	OL-4029	14.0	.08	.50	C-2F	1,500
18	OL-4185	14.0	.10	.50	C-2F	10,000
19	OL-4096	16.0	.03	.034	C-2F	25,000
20	OL-4059	24.0	.035	.13	C-2F	25,000
21	OL-4073	28.0	.024	.15	C-2F	5,000
22	OL-4132	28.0	.04	.20	C-2F	25,000
23	OL-4008	28.0	.04	.30	C-2F	7,000
24	OL-627	28.0	.04	.34	C-2F	4,000

Lamp Design Characteristics

Unit in mm  
(inch)

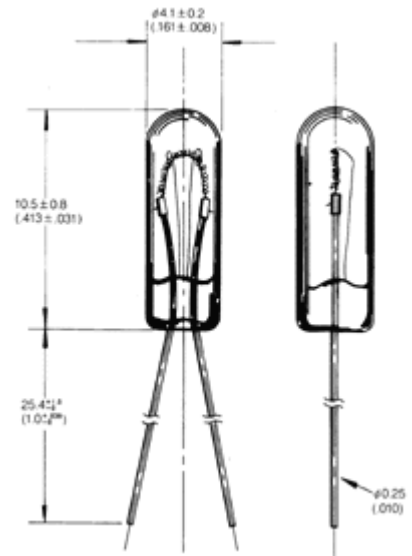


Copyright © 2006 OSHINO LAMPS LIMITED All Rights Reserved.

## Wire Terminal

### T-1 3/4 Wire Terminal

Line Nos.	Oshino Lamp Numbers	Design Volts	Design Amps	AVG. MSCd	Filament shape	Life (hours)
1	OL-1783	2.5	.20	.20	C-2R	500
2	OL-2169	2.5	.35	.21	C-2R	10,000
3	OL-1738	2.7	.06	.04	C-2R	6,000
4	OL-6130	3.0	.04	.03	C-2R	10,000
5	OL-2171	4.5	.12	.045	C-2V	25,000
6	OL-2208	5.0	.015	.002	C-2V	25,000
7	OL-6029	5.0	.02	.02	C-2V	10,000
8	OL-6134	5.0	.03	.03	C-2R	16,000
9	OL-6062	5.0	.04	.025	C-2R	50,000
10	OL-805	5.0	.06	.03	C-2R	200,000
11	OL-806	5.0	.06	.05	C-2R	100,000
12	OL-6083	5.0	.06	.15	C-2R	5,000
13	OL-6232	5.0	.075	.09	C-2R	40,000
14	OL-807	5.0	.115	.15	C-2R	40,000
15	OL-1083	5.0	.22	.60	C-2R	500
16	OL-1730	6.0	.04	.04	C-2V	10,000
17	OL-6225	6.0	.06	.13	C-2R	3,000
18	OL-1784	6.0	.20	.34@5V	C-2R	1,000
19	OL-2180	6.3	.04	.03	C-2V	50,000
20	OL-1739	6.3	.075	.23	C-2R	1,000
21	OL-6048	6.3	.15	.45	C-2R	3,000
22	OL-2181	6.3	.20	.40	C-2F	50,000
23	OL-2112	6.3	.20	.55	C-2R	5,000
24	OL-1869	10.0	.014	.004	C-2F	50,000
25	OL-6066	10.0	.027	.10	C-2V	3,000
26	OL-2107	10.0	.04	.08	C-2F	5,000
27	OL-2174	12.0	.04	.12	C-2F	10,000
28	OL-6037	12.0	.06	.15	C-2F	16,000

Lamp Design Characteristics

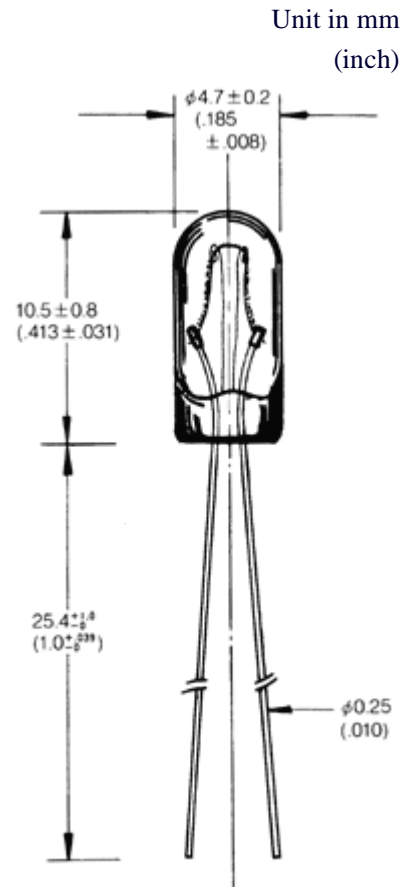



29	OL-2182	14.0	.08	.30	C-2F	50,000
30	OL-1705	14.0	.08	.50	C-2F	1,500
31	OL-1705L	14.0	.088	.50	C-2F	4,000
32	OL-2162	14.0	.10	.50	C-2F	10,000
33	OL-6002	15.0	.037	.075	C-2F	50,000
34	OL-2102	18.0	.04	.15	C-2F	10,000
35	OL-425	22.0	.04	.30	C-2F	2,000
36	OL-6004	24.0	.05	.50	C-2F	1,000
37	OL-6033	28.0	.024	.15	C-2F	5,000
38	OL-2185	28.0	.04	.20	C-2F	25,000
39	OL-2187	28.0	.04	.30	C-2F	7,000
40	OL-1764	28.0	.04	.34	C-2F	4,000
41	OL-1764LSV	28.0	.06	.34	C-2F	25,000
42	OL-361	28.0	.06	.60	C-2F	5,000
43	OL-6435	28.0	.065	.65	C-2F	10,000
44	OL-6234	32.0	.033	.34	C-2F	10,000

Copyright © 2006 OSHINO LAMPS LIMITED All Rights Reserved.



Groupe OSHINO



SYNDICAT NATIONAL  
DE L'ENSEIGNEMENT  
ET DE L'ÉDUCATION

**OSHINO LAMPS FRANCE**  
Téléport 4 - ZT Pyrène Aéro Pôle - 65290 JUILLAN  
Tél: +33 (0)5 62 32 63 63 / Fax: +33 (0)5 62 32 63 65  
Email: info@oshino-lamps.fr / Site: www.oshino-lamps.com



FRANCE  
200310775